


FlexiGum

Product Data



FlexiGum Series SGB150/300/450/600

Soft Gummy Production Line

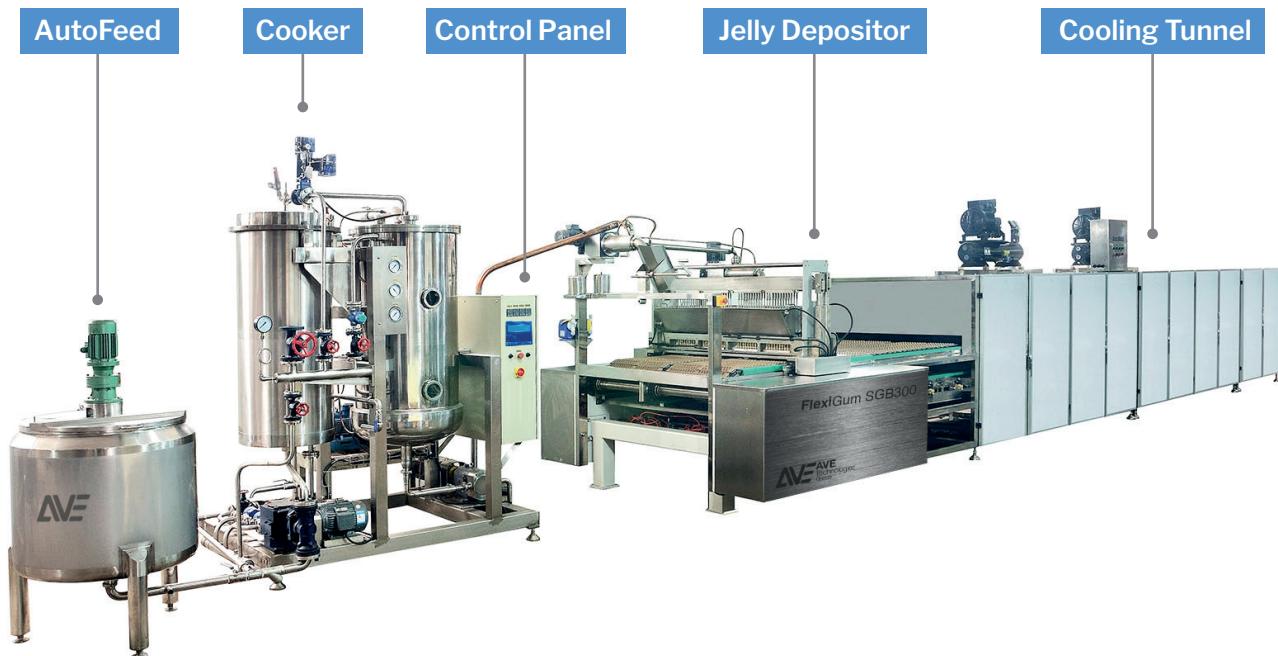

Description

AVE Technologies No-starch system for soft gummies deposit high-solids syrup into silicone rubber, plastic, or aluminum moulds rather than starch. There is no requirement for starch anywhere on the line reducing the drying time to minimum.

The FlexiGum Series SGB150/300/450/600 soft gummy production line is an ideal option for producing gummies from Carrageenan, Gelatin or Pectin.

Features:

The machine is fully driven by servo motors, controlled by a 5 Axis motion controller. Soft gummy bear depositing machines feature one, two, three and four rows of moulds.

Technical Specification	FlexiGum SGB Series
Production Capacity	150-600kg/h
Power Consumption	15-30kw
Steam Consumption	450kg/h
Weight of candy	3.5-15g
Steam pressure	0.4~0.8Mpa
Compressed air consumption	0.6m ³ /min
Temperature of workshop	20-25c
Humidity of workshop	55%
Weight	4000-6000 kg



- Durable non-stick Teflon coated aluminium moulds

